



Ilumo LED



Modern, hermetic luminaire with multiple functions. ILUMO LED is equipped with the latest generation of LED sources closed in the aesthetic, aluminum housing with IP66 degree of protection.

Ausführung: electrostatically painted aluminium housing (grey colour in standard). Possibility of painting in any color from RAL palette. Transparent tempered glass. Through wiring on request.

Montageart: for the ground, wall mounting, surface mounting

Einspeisung: 230 V

ELEKTRISCHE PRODUKTDATEN

Leuchtmittel	LED
Lampenzahl	1
Lieferbares Zubehör	Netzteil
Nennspannung zur Durchverdrahtung angebracht	220 ... 240 V
mit Leuchtmittel bestückt	Ja

MECHANISCHE PRODUKTDATEN

Montagearten	Bodeneinbau
Gehäuse-Material	Aluminium

INFORMATIONSDATEN

Farbe	grau
Betriebstemperaturumfang	-25 ... 40 °C
drehbar	Ja

ZERTIFIKATE UND PREISE

Schutzart IP	IP66
Schutzart IP /obere/	IP67
Schlagfestigkeit	IK10
Schutzklasse	Schutzklasse I, Schutzleiteranschluss
Lampenschutz	Ja
Energie Klasse	A+
CE	Ja
EAC	Ja

LICHTTECHNISCHE DATEN

Lichtverteilung	Lichtaustritt DI
Schutzklasse der Leuchte	I
MacAdam	SDCM 3


AUSFÜHRUNGEN

Artikelnummer	Leuchtenanschlussleistung [W]	Leuchtenlichtstrom [lm]	Abstrahlwinkel / Ausstrahlungswinkel [°]	Light output degradation	Lumen maintenance	Lifetime [h]	Lamp Lumen Maintenance Factor (after 60 000h) [%]	Farbtemperatur	Infos	Gewicht [kg]
PX4090301	9	1120	12	B20	L90	> 60000	96	4000K	D	1,50
PX4090308	9	1160	20	B20	L90	> 60000	96	4000K	M	1,50
PX4090315	9	990	38	B20	L90	> 60000	96	4000K	W	1,50
PX4090322	9	890	-	B20	L90	> 60000	96	4000K	AS	1,50
PX4090329	16	2240	12	B20	L90	> 60000	96	4000K	D	2,50
PX4090336	16	2330	20	B20	L90	> 60000	96	4000K	M	2,50
PX4090343	16	1990	38	B20	L90	> 60000	96	4000K	W	2,50
PX4090350	16	1780	-	B20	L90	> 60000	96	4000K	AS	2,50

AUSFÜHRUNGEN

Artikelnummer	Leuchtenanschlussleistung [W]	Leuchtenlichtstrom [lm]	Abstrahlwinkel / Ausstrahlungswinkel [°]	Light output degradation	Lumen maintenance	Lifetime [h]	Lamp Lumen Maintenance Factor (after 60 000h) [%]	Farbtemperatur	Infos	Gewicht [kg]
PX4090357	23	3360	12	B20	L90	> 60000	96	4000K	D	3,50
PX4090364	23	3490	20	B20	L90	> 60000	96	4000K	M	3,50
PX4090371	23	2980	38	B20	L90	> 60000	96	4000K	W	3,50
PX4090378	23	2670	-	B20	L90	> 60000	96	4000K	AS	3,50
PX4090385	30	4480	12	B20	L90	> 60000	96	4000K	D	4,80
PX4090392	30	4660	20	B20	L90	> 60000	96	4000K	M	4,80
PX4090399	30	3980	38	B20	L90	> 60000	96	4000K	W	4,80
PX4090406	30	3560	-	B20	L90	> 60000	96	4000K	AS	4,80
PX4090413	22	-	20	B50	L70	> 50000	67	-	RGB	2,40
PX4090420	36	-	20	B50	L70	> 50000	67	-	RGB	4,60

ABMESSUNGEN

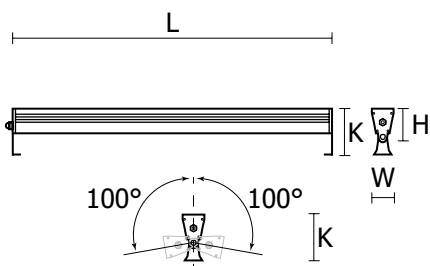

Artikelnummer	L [mm]	W [mm]	H [mm]	K [mm]
PX4090301	340	64	86	126
PX4090308	340	64	86	126
PX4090315	340	64	86	126
PX4090322	340	64	86	126
PX4090329	640	64	86	126
PX4090336	640	64	86	126
PX4090343	640	64	86	126
PX4090350	640	64	86	126
PX4090357	940	64	86	126
PX4090364	940	64	86	126
PX4090371	940	64	86	126
PX4090378	940	64	86	126
PX4090385	1240	64	86	126
PX4090392	1240	64	86	126
PX4090399	1240	64	86	126
PX4090406	1240	64	86	126
PX4090413	600	64	86	126
PX4090420	1160	64	86	126

L = Länge | W = Breite | H = Höhe / Einbautiefe | K = Additional dimension

DECKENAUSCHNITT

Artikelnummer	A [mm]	B
PX4090301	262	44
PX4090308	262	44
PX4090315	262	44
PX4090322	262	44
PX4090329	562	44
PX4090336	562	44
PX4090343	562	44
PX4090350	562	44